



solid-state time-delayed front-side auxiliary switch Time range 0.05...1 s, 24 V AC/DC, 1 NO contact, 1 NC contact ON delay, for 3RT1

|   |                       |
|---|-----------------------|
| <b>product brand name</b>   | SIRIUS                |
| <b>product designation</b>  | auxiliary switch      |
| <b>design of the product</b>  | slow-operating        |
| <b>product type designation</b>   | 3RT19                 |
| <b>General technical data</b>   |                       |
| <b>size of contactor can be combined company-specific</b>   | S0 ... S12            |
| product component semi-conductor output   | No                    |
| <b>product extension required remote control</b>  | No                    |
| <b>product extension optional remote control</b>  | No                    |
| insulation voltage for overvoltage category III according to IEC 60664 with degree of pollution 3 rated value | 300 V                 |
| <b>degree of pollution</b>  | 3                     |
| <b>surge voltage resistance rated value</b>   | 4 000 V               |
| shock resistance acc. to IEC 60068-2-27   | 11g / 15 ms           |
| vibration resistance acc. to IEC 60068-2-6  | 10 ... 55 Hz: 0.35 mm |
| mechanical service life (switching cycles) typical  | 10 000 000            |
| electrical endurance (switching cycles) at AC-15 at 230 V typical   | 50 000                |
| <b>adjustable time</b>  | 0.05 ... 1 s          |
| <b>relative setting accuracy relating to full-scale value</b>   | 15 %                  |
| <b>recovery time</b>  | 150 ms                |
| <b>reference code acc. to IEC 81346-2</b>   | K                     |
| <b>relative repeat accuracy</b>   | 1 %                   |
| <b>Product Function</b>   |                       |
| <b>product function star-delta circuit</b>  | No                    |
| <b>Control circuit/ Control</b>   |                       |
| <b>type of voltage of the control supply voltage</b>  | AC/DC                 |
| <b>control supply voltage 1 at AC</b>   |                       |
| • at 50 Hz rated value  | 24 V                  |
| • at 60 Hz rated value  | 24 V                  |
| <b>control supply voltage frequency 1</b>   | 50 ... 60 Hz          |
| • control supply voltage 1 at DC rated value  | 24 V                  |
| <b>operating range factor control supply voltage rated value at DC</b>  |                       |
| • initial value   | 0.85                  |
| • full-scale value  | 1.1                   |
| <b>operating range factor control supply voltage rated value at AC at 50 Hz</b>                               |                       |

|  |                 |
|--|-----------------|
| <ul style="list-style-type: none"> <li>• initial value</li> </ul>  | 0.85            |
| <ul style="list-style-type: none"> <li>• full-scale value</li> </ul>   | 1.1             |
| <b>operating range factor control supply voltage rated value at AC at 60 Hz</b>  |                 |
| <ul style="list-style-type: none"> <li>• initial value</li> </ul>  | 0.85            |
| <ul style="list-style-type: none"> <li>• full-scale value</li> </ul>   | 1.1             |
| <b>Switching Function</b>  |                 |
| <b>switching function</b>  |                 |
| <ul style="list-style-type: none"> <li>• ON-delay</li> </ul>   | Yes             |
| <ul style="list-style-type: none"> <li>• ON-delay/instantaneous contact</li> </ul>   | No              |
| <ul style="list-style-type: none"> <li>• passing make contact</li> </ul>   | No              |
| <ul style="list-style-type: none"> <li>• passing make contact/instantaneous contact</li> </ul>                             | No              |
| <ul style="list-style-type: none"> <li>• OFF delay</li> </ul>  | No              |
| <b>switching function</b>  |                 |
| <ul style="list-style-type: none"> <li>• flashing symmetrically with interval start/instantaneous</li> </ul>               | No              |
| <ul style="list-style-type: none"> <li>• flashing symmetrically with interval start</li> </ul>                             | No              |
| <ul style="list-style-type: none"> <li>• flashing symmetrically with pulse start/instantaneous</li> </ul>                  | No              |
| <ul style="list-style-type: none"> <li>• flashing symmetrically with pulse start</li> </ul>                                | No              |
| <ul style="list-style-type: none"> <li>• flashing asymmetrically with interval start</li> </ul>                            | No              |
| <ul style="list-style-type: none"> <li>• flashing asymmetrically with pulse start</li> </ul>                               | No              |
| <b>switching function</b>  |                 |
| <ul style="list-style-type: none"> <li>• constant clock cycle with pulse start</li> </ul>                                  | No              |
| <ul style="list-style-type: none"> <li>• constant clock cycle with interval start</li> </ul>                               | No              |
| <b>switching function</b>  |                 |
| <ul style="list-style-type: none"> <li>• variably clocked with pulse start</li> </ul>                                      | No              |
| <ul style="list-style-type: none"> <li>• variably clocked with interval start</li> </ul>                                   | No              |
| <b>switching function</b>  |                 |
| <ul style="list-style-type: none"> <li>• star-delta circuit with delay time</li> </ul>                                     | No              |
| <ul style="list-style-type: none"> <li>• star-delta circuit</li> </ul>   | No              |
| <b>switching function with control signal</b>  |                 |
| <ul style="list-style-type: none"> <li>• additive ON-delay</li> </ul>  | No              |
| <ul style="list-style-type: none"> <li>• passing break contact</li> </ul>  | No              |
| <ul style="list-style-type: none"> <li>• passing break contact/instantaneous</li> </ul>                                    | No              |
| <ul style="list-style-type: none"> <li>• OFF delay</li> </ul>  | No              |
| <ul style="list-style-type: none"> <li>• OFF delay/instantaneous</li> </ul>  | No              |
| <ul style="list-style-type: none"> <li>• pulse delayed</li> </ul>  | No              |
| <ul style="list-style-type: none"> <li>• pulse delayed/instantaneous</li> </ul>  | No              |
| <ul style="list-style-type: none"> <li>• pulse-shaping</li> </ul>  | No              |
| <ul style="list-style-type: none"> <li>• pulse-shaping/instantaneous</li> </ul>  | No              |
| <ul style="list-style-type: none"> <li>• additive ON-delay/instantaneous</li> </ul>  | No              |
| <ul style="list-style-type: none"> <li>• ON-delay/OFF-delay</li> </ul>   | No              |
| <ul style="list-style-type: none"> <li>• ON-delay/OFF-delay/instantaneous</li> </ul>                                       | No              |
| <ul style="list-style-type: none"> <li>• passing make contact</li> </ul>   | No              |
| <ul style="list-style-type: none"> <li>• passing make contact/instantaneous contact</li> </ul>                             | No              |
| <b>switching function of interval relay with control signal</b>  |                 |
| <ul style="list-style-type: none"> <li>• retrotriggerable with deactivated control signal/instantaneous contact</li> </ul> | No              |
| <ul style="list-style-type: none"> <li>• retrotriggerable with switched-on control signal</li> </ul>                       | No              |
| <ul style="list-style-type: none"> <li>• retrotriggerable with switched-on control signal/instantaneous contact</li> </ul> | No              |
| <ul style="list-style-type: none"> <li>• retriggerable with deactivated control signal</li> </ul>                          | No              |
| <b>design of the control terminal non-floating</b>   | No              |
| <b>Short-circuit protection</b>  |                 |
| design of the fuse link for short-circuit protection of the auxiliary switch required                                      | fuse gL/gG: 4 A |
| <b>Auxiliary circuit</b>   |                 |
| <b>number of NC contacts</b>   |                 |

|  |  |
|--|--|
| <ul style="list-style-type: none"> <li>• delayed switching</li> <li>• instantaneous contact</li> </ul>   | 1  |
| <b>number of NO contacts</b>   | 0  |
| <ul style="list-style-type: none"> <li>• delayed switching</li> <li>• instantaneous contact</li> </ul>   | 1  |
| <b>number of CO contacts</b>   | 0  |
| <ul style="list-style-type: none"> <li>• delayed switching</li> <li>• instantaneous contact</li> </ul>   | 0  |
| <b>operational current of auxiliary contacts at AC-15</b>  |  |
| <ul style="list-style-type: none"> <li>• maximum</li> </ul>  | 3 A  |
| <b>operational current of auxiliary contacts as NC contact at AC-15</b>  |  |
| <ul style="list-style-type: none"> <li>• at 24 V</li> <li>• at 250 V</li> </ul>  | 3 A<br>3 A   |
| <b>operational current of auxiliary contacts as NO contact at AC-15</b>  |  |
| <ul style="list-style-type: none"> <li>• at 24 V</li> <li>• at 250 V</li> </ul>  | 3 A<br>3 A   |
| <b>operational current of auxiliary contacts at DC-13</b>  |  |
| <ul style="list-style-type: none"> <li>• at 24 V</li> <li>• at 125 V</li> <li>• at 250 V</li> </ul>  | 1 A<br>0.2 A<br>0.1 A  |
| <b>Inputs/ Outputs</b>   |  |
| <b>product function</b>  |  |
| <ul style="list-style-type: none"> <li>• at the relay outputs switchover delayed/without delay</li> <li>• non-volatile</li> </ul>  | No<br>No   |
| <b>Electromagnetic compatibility</b>   |  |
| EMC immunity acc. to IEC 61812-1   | EN 61000-6-2   |
| <b>conducted interference</b>  |  |
| <ul style="list-style-type: none"> <li>• due to burst acc. to IEC 61000-4-4</li> <li>• due to conductor-earth surge acc. to IEC 61000-4-5</li> <li>• due to conductor-conductor surge acc. to IEC 61000-4-5</li> </ul> | 2 kV network connection / 1 kV control connection<br>2 kV<br>1 kV  |
| <b>field-based interference acc. to IEC 61000-4-3</b>  | 10 V/m   |
| <b>electrostatic discharge acc. to IEC 61000-4-2</b>   | 4 kV contact discharge / 8 kV air discharge  |
| <b>Safety related data</b>   |  |
| <b>touch protection against electrical shock</b>   | finger-safe  |
| <b>protection class IP on the front acc. to IEC 60529</b>  | IP20   |
| <b>type of insulation</b>  | Basic insulation   |
| <b>category acc. to EN 954-1</b>   | none   |
| <b>Connections/ Terminals</b>  |  |
| product function removable terminal for auxiliary and control circuit  | No   |
| type of electrical connection for auxiliary and control circuit  | screw-type terminals   |
| <b>type of connectable conductor cross-sections</b>  |  |
| <ul style="list-style-type: none"> <li>• solid</li> <li>• finely stranded with core end processing</li> <li>• at AWG cables solid</li> <li>• at AWG cables stranded</li> </ul>   | 1x (0.5 ... 4.0 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> )<br>1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> )<br>2x (20 ... 14)<br>2x (20 ... 14) |
| <ul style="list-style-type: none"> <li>• connectable conductor cross-section solid</li> <li>• connectable conductor cross-section finely stranded with core end processing</li> </ul>                                  | 0.5 ... 4 m <sup>2</sup><br>0.5 ... 2.5 m <sup>2</sup>   |
| <ul style="list-style-type: none"> <li>• AWG number as coded connectable conductor cross section solid</li> <li>• AWG number as coded connectable conductor cross section stranded</li> </ul>                          | 18 ... 14<br>18 ... 14   |
| <b>Installation/ mounting/ dimensions</b>  |  |
| <b>mounting position</b>   | any  |

|  |         |
|--|---------|
| <b>fastening method</b>  | clip-on |
| <b>height</b>  | 46 mm   |
| <b>width</b>   | 33 mm   |
| <b>depth</b>   | 73 mm   |
| <b>required spacing</b>  |         |
| <ul style="list-style-type: none"> <li>● with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards 0 m</li> <li>— backwards 0 m</li> <li>— upwards 0 m</li> <li>— downwards 0 m</li> <li>— at the side 0 m</li> </ul> </li> <li>● for grounded parts <ul style="list-style-type: none"> <li>— forwards 0 m</li> <li>— backwards 0 m</li> <li>— upwards 0 m</li> <li>— at the side 0 m</li> <li>— downwards 0 m</li> </ul> </li> <li>● for live parts <ul style="list-style-type: none"> <li>— forwards 0 m</li> <li>— backwards 0 m</li> <li>— upwards 0 m</li> <li>— downwards 0 m</li> <li>— at the side 0 m</li> </ul> </li> </ul> |         |

|   |             |
|---|-------------|
| <b>Ambient conditions</b>   |             |
| installation altitude at height above sea level maximum   | 2 000 m     |
| <ul style="list-style-type: none"> <li>● ambient temperature during operation -25 ... +60 °C</li> <li>● ambient temperature during storage -40 ... +85 °C</li> <li>● ambient temperature during transport -40 ... +85 °C</li> </ul> |             |
| relative humidity during operation  | 15 ... 95 % |

|                                 |            |                                  |
|---------------------------------|------------|----------------------------------|
| <b>Certificates/ approvals</b>  |            |                                  |
| <b>General Product Approval</b> | <b>EMC</b> | <b>Declaration of Conformity</b> |



|                                  |                          |                          |
|----------------------------------|--------------------------|--------------------------|
| <b>Declaration of Conformity</b> | <b>Test Certificates</b> | <b>Marine / Shipping</b> |
|----------------------------------|--------------------------|--------------------------|

[Miscellaneous](#)

[Miscellaneous](#)

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



|                          |              |                |
|--------------------------|--------------|----------------|
| <b>Marine / Shipping</b> | <b>other</b> | <b>Railway</b> |
|--------------------------|--------------|----------------|



[Confirmation](#)

[Miscellaneous](#)

[Special Test Certificate](#)

**Further information**

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1926-2EJ11>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1926-2EJ11>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3RT1926-2EJ11>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT1926-2EJ11&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1926-2EJ11&lang=en)

Characteristic: Derating

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1926-2EJ11/manual>

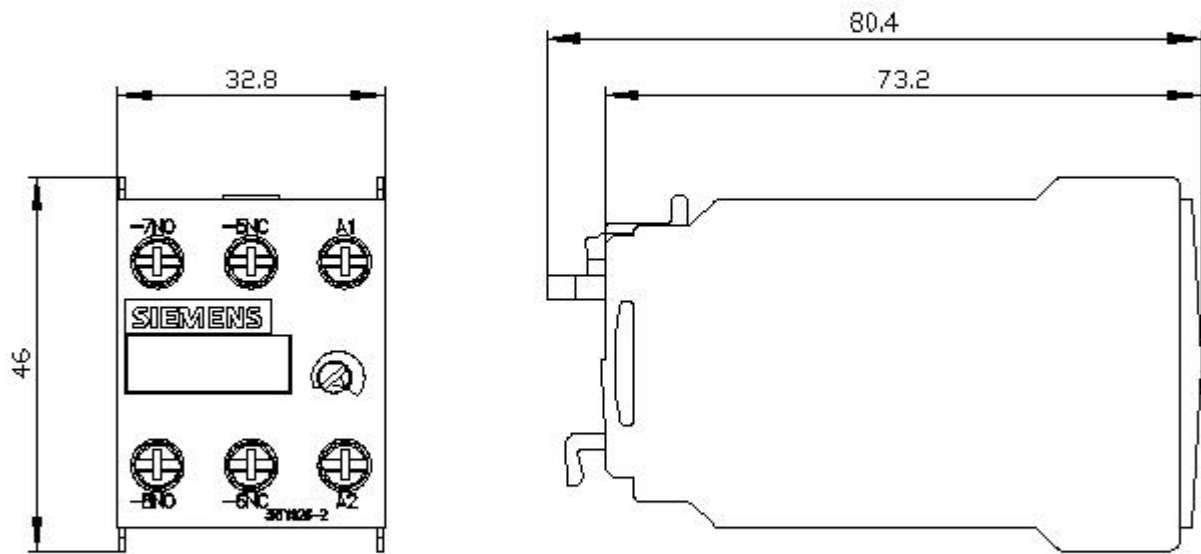

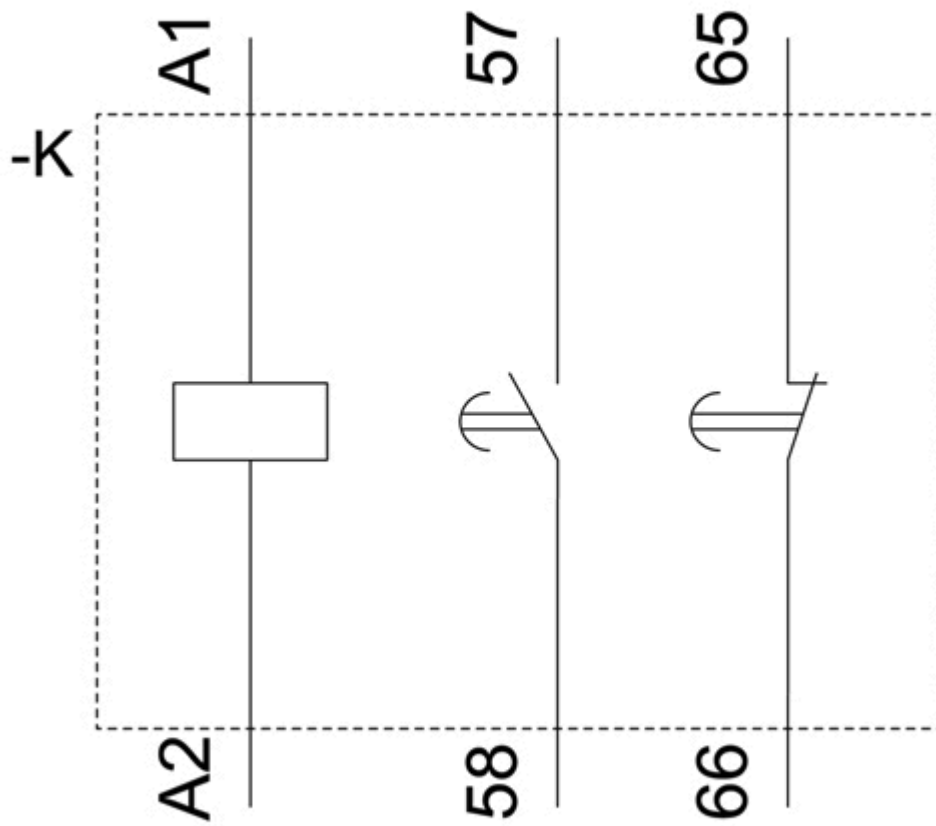

last modified:

12/19/2020 